


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 35 TOWNSHIP 17 RANGE 3
DATE: -4-24-99- 6-23-05
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 3-14-93
EDM

IN. S.P.C. E ZONE, NAD 83
NAME: 17033504
N: 513837.3110(m)
E: 57367.3260(m)

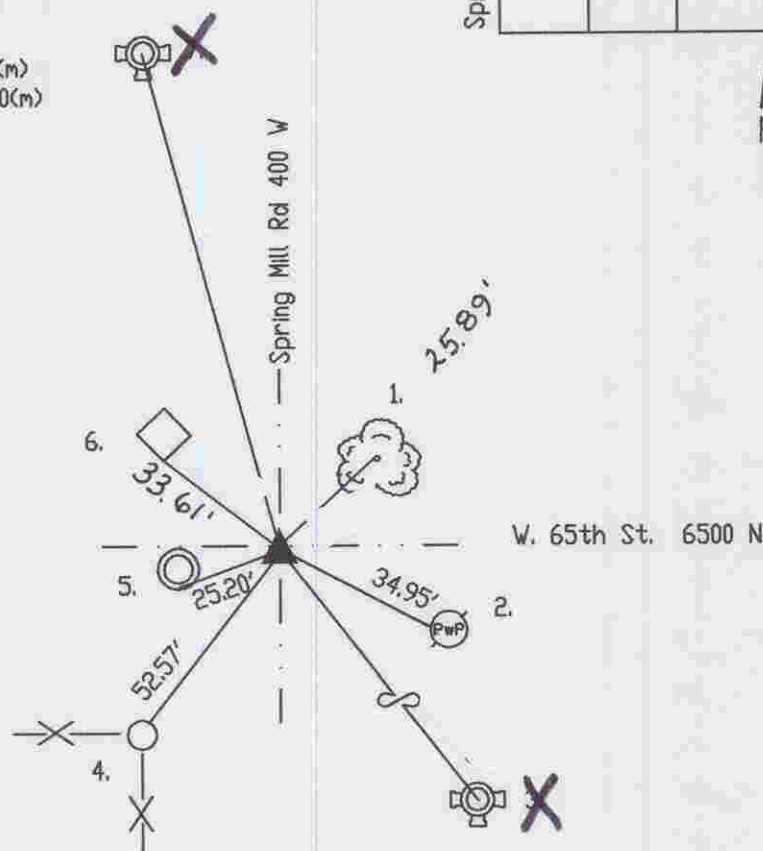

Original post set 1820 by Wm. B. Laughlin with witnesses: 14" hickory S 30 E 12 links, 30" elm S 80 W 26 links per Marion County Atlas pg. 8. Survey by D.B. Hosbrook 5-20-1850 indicates no stone but witness: 5" cherry N 52 W 2 1/2 links, 16" beech S 80 1/2 E 42 links per Washington Township Legal Survey Book pg. 8. Woerner 9-11-48 called a road nail with brass washer. Monroe 4-21-58 called road nail with brass washer. Hiselman 4-6-76 called PK nail. Greene 11-24-87 called same. Wilcoxon 3-14-93 called same. Excavated by Wilcoxon 10-19-98 and found a 1" steel pin 8" down. Harrison set.

HC733504

REF.	DISTANCE	DESCRIPTION
1.	25.89'	Mag nail NW stump of osage orange spur root
2.	34.95'	PK nail W PwP#62-305A 8'up
3.	164.75'	Top nut of fire hydrant
4.	52.57'	Face of steel fence post
5.	25.20'	Cut 'x' S-rim manhole
6.	33.61'	Southerly corner of concrete post base
7.	148.25'	Top nut of fire hydrant